

# BATTERY CALENDER

## FOR CONTINUOUS COATED ELECTRODES

### TECHNICAL DATA

Web width: up to 1,500 mm

Production speed: up to 150 m/min

Roller diameter: up to 1,000 mm

Gap accuracy:  $\pm 1 \mu\text{m}$

Compression force: up to 300 tons

Roller temperature: +10 °C up to +200 °C

### YOUR ADVANTAGES

Patented gap control system

Very sturdy and compact design

Direct drive of each roller

Inline/offline applications

Easily operated

High automation level

One-stop-shop

Thermal oil or electrical heated rolls

### OPTIONAL

Control engineering:  
electro hydraulic

Thickness measurement (non  
contact)

Web cleaning device (non contact)

Preheating (IR-Field, S-Roll design)

Cutting units

Splice system


Remote maintenance

Inspection system

Marking system

Load measurement devices

Rollers with hardness values of up  
to 68 HRC

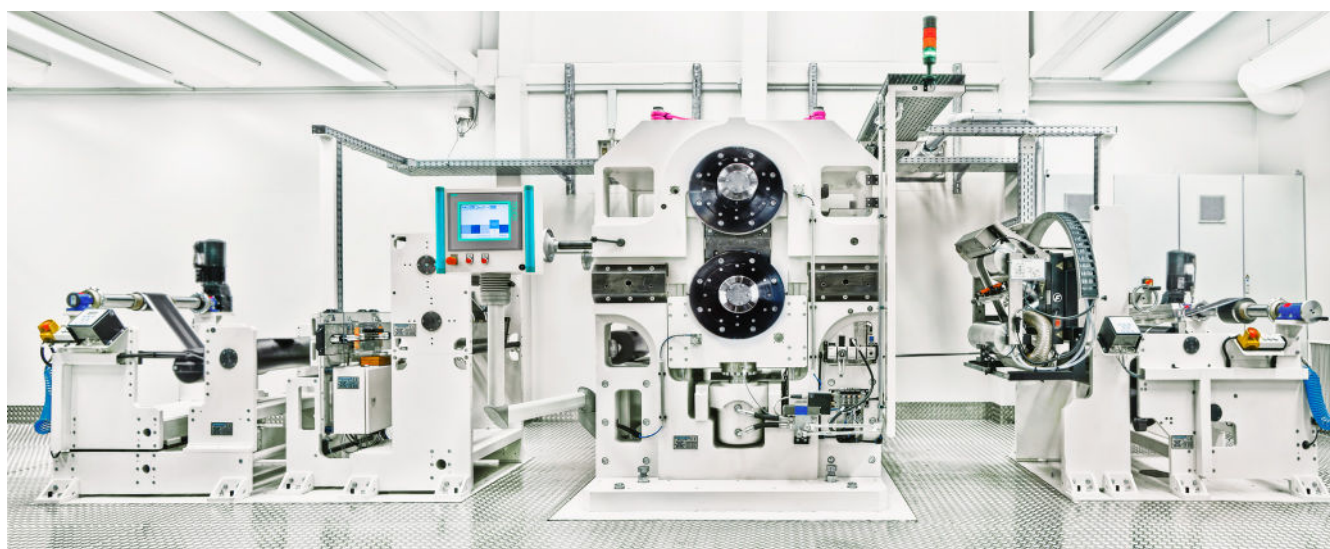

**Matthews International GmbH**

Gutenbergstraße 1-3 | 48691 Vreden | Germany | T: +49 2564 120  
info@matthews-engineering.com | matthews-engineering.com

A Matthews International company